

Output adaptor 4-20 mA

2-wire principle passive

Insert the adaptor as follows:

A port with a small 4-pole contact strip is located on the main board of the LX-2 / LX-NET / LX-GSM / UX-400 devices.
The adaptor has to be plugged and fixed with an M3 screw here.



Connection data:

Output clamp: (1) plus (2) minus


Two-wire principle with 10 - 30 V operating voltage.

4 mA output current = 0% tank inventory.

20 mA output current = 100% tank inventory.

The characteristic curve of the signal is proportional to the liter inventory.

Adaptor Plug for LX-2 / LX-2-R

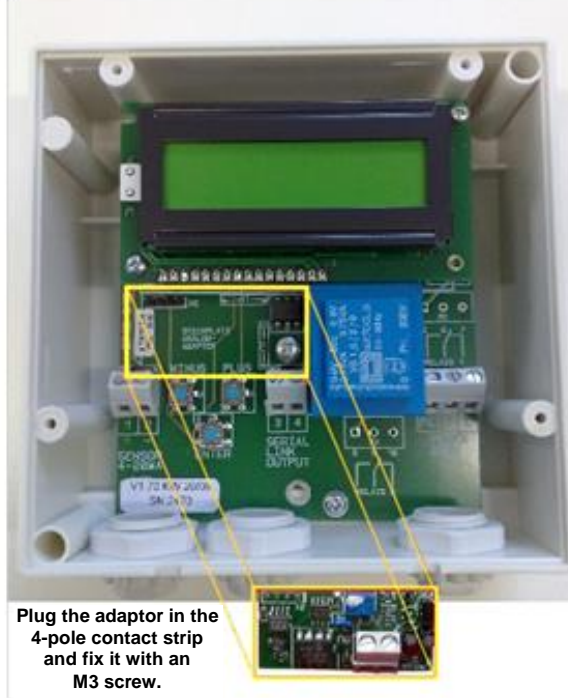

Adaptor Plug for the larger LX devices



Standard: Active Measurement Input

