


Output Adaptor 4-20 mA


EN

Output Adaptor 4-20 mA:

On the mainboard of the tank gauge, there is a slot with a small 4-pin contact strip. The Adaptor has to be plugged in and fixed with the M3 screw.



Slot in device LX-2, LX-2-R, e-Litro

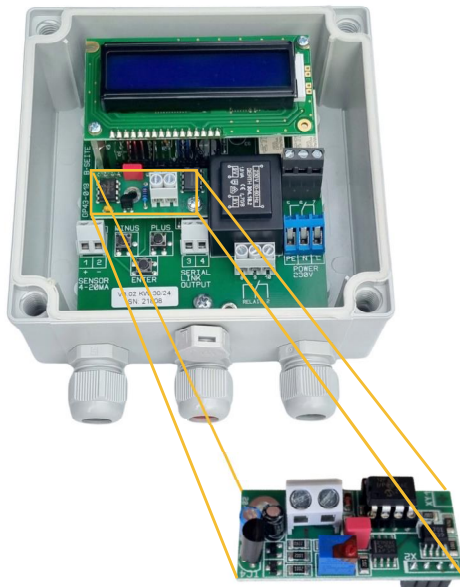

Connection Data:

Output terminal: (1) plus (2) minus

Two-wire principle with operating voltage 10 - 24 V max.

4 mA = 0% tank capacity

... 12 mA = 50% tank capacity

... 20 mA = 100% tank capacity

The signal characteristic is proportional to the liter inventory.

Standard:

